

# PRODUCT DATA SHEET

Model: PZAT3S

Packaged Air-Cooled  
3 Ton Chiller




Legacy Chiller Systems

851 Tech Drive  
Telford, PA 18969

Toll-Free: (877) 988-5464

with Stainless Steel Tank

**STANDARD ON ALL  
LEGACY CHILLER MODELS:**  
Pentra Microsmart, Programmable  
Logic Controller (PLC)  
with HMI Touch Screen Display.

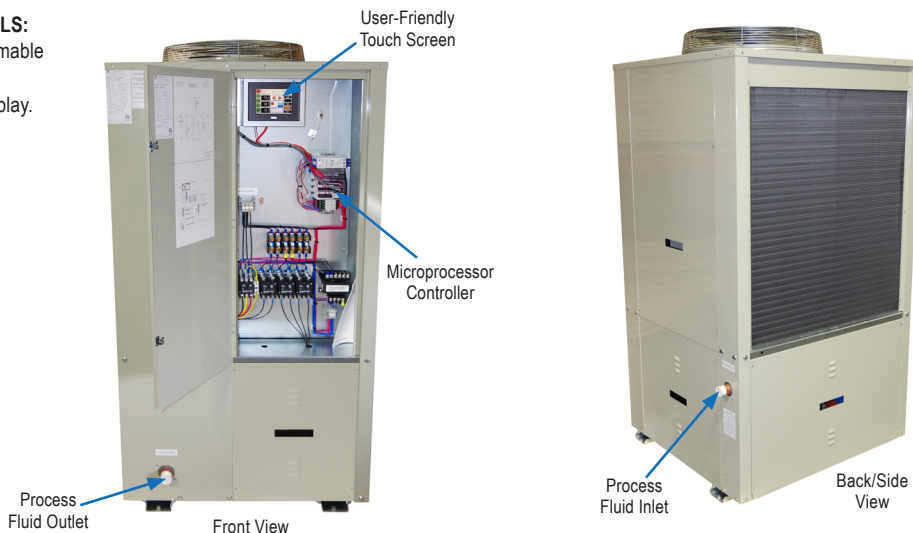

## Standard Features:

- ETL listed to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- Single point power connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- STAINLESS STEEL Tank
- STAINLESS STEEL, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction accumulator
- Water flow switch
- Hot gas by-pass capacity control
- 24V control transformer
- Direct drive condenser fan motor
- Rust resistant, high CFM, aluminum condenser fan blade
- Condenser(s): copper tube/aluminum fin
- Compressor motor contactor
- Condenser motor and control circuit fusing
- Painted (Powder Coated), galvanized sheet metal cabinet
- 1/2" insulation on all water and Low pressure refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**
- **Extended warranty:** See your quote or latest IOM booklet revision

**Easy to Use  
Touch Screen Display  
on all Legacy Chiller  
Models**



## Options:

- Copeland Digital Scroll Compressor
- Remote Idec touchscreen control panel
- Industrial VPN Router
- 5 Port Ethernet Switch
- BacNet Gateway
- Process Pump VFD Controller
- VFD Compressor Control
- 4 year extended compressor warranty
- Casters (factory mounted)
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and High/Low voltage
- Compressor fusing
- Compressor Sound Cover
- Flooded cond. w/receiver/head pressure control (0°F)
- Heated, flooded cond. w/receiver/head pressure Water flow meter control (-20°F)
- Dual process pump with auto changeover
- Pump suction isolation valve
- Water pressure gauge set
- Copper finned condenser coil (coastal protection)
- Coastal powder coat paint protection
- E-Coat Condenser Coil (coastal protection)
- Water Flow Meter
- Auto city water make up solenoid & auto level switch
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionize and reverse osmosis water systems
- Storage tank sight glass
- Door Mounted HMI with weather proof cover

# PRODUCT DATA SHEET

Model: **PZAT3S**  
*Packaged Air-Cooled*  
*3 Ton Chiller*



**Legacy Chiller Systems**  
 851 Tech Drive  
 Telford, PA 18969  
**Toll-Free: (877) 988-5464**

*with Stainless Steel Tank*

## Dimensional & Electrical Table

Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA ea.	LRA ea.	Fan Motor		Recirculation Pump FLA	MCA	M.O.P	Reservoir Gal.	Chiller Fluid Conn.	Weight Pounds				
				Voltage	Phase	Freq.	Qty.	HP			Qty.	FLA.										
PZAT3SE5	36	34	68	208/230V	1	60Hz	1	4	21.8	137	1	3.8	4.2	40	50	20	1" FPT	800				
PZAT3SF5				208/230V	3	60Hz			15.4	114									3.8	4.2	30	40
PZAT3SH5				460V	3	60Hz			7.1	58									1.5	0.9	15	20
PZAT3SI5				575V	3	60Hz			5.2	43									1.72	0.72	15	15

## Capacity Table (Refrigerant R407C)

Model	Compressor	LWT °F	80°F			90°F			95°F			100°F			105°F		
			TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER
3S	ZS29KAE	*42.0	3.1	3.4	10.3	2.9	3.8	9.2	2.9	3.9	8.6	2.8	4.1	8.1	2.7	4.3	7.6
		*44.0	3.3	3.5	10.6	3.1	3.8	9.4	3.0	4.0	8.8	2.9	4.1	8.4	2.8	4.4	7.8
		45.0	3.5	3.5	10.8	3.2	3.8	9.6	3.1	4.0	9.0	3.0	4.2	8.5	2.9	4.4	7.9
		50.0	3.7	3.6	11.4	3.5	3.9	10.2	3.4	4.1	9.6	3.3	4.3	9.1	3.2	4.5	8.5

\* = Requires the use of glycol.



## Product Dimensional Drawing

