


PRODUCT DATA SHEET

Model: **IEZA2.5S**
Split-System Air-Cooled
2.5 Ton Chiller



Legacy Chiller Systems
851 Tech Drive
Telford, PA 18969
Toll-Free: (877) 988-5464

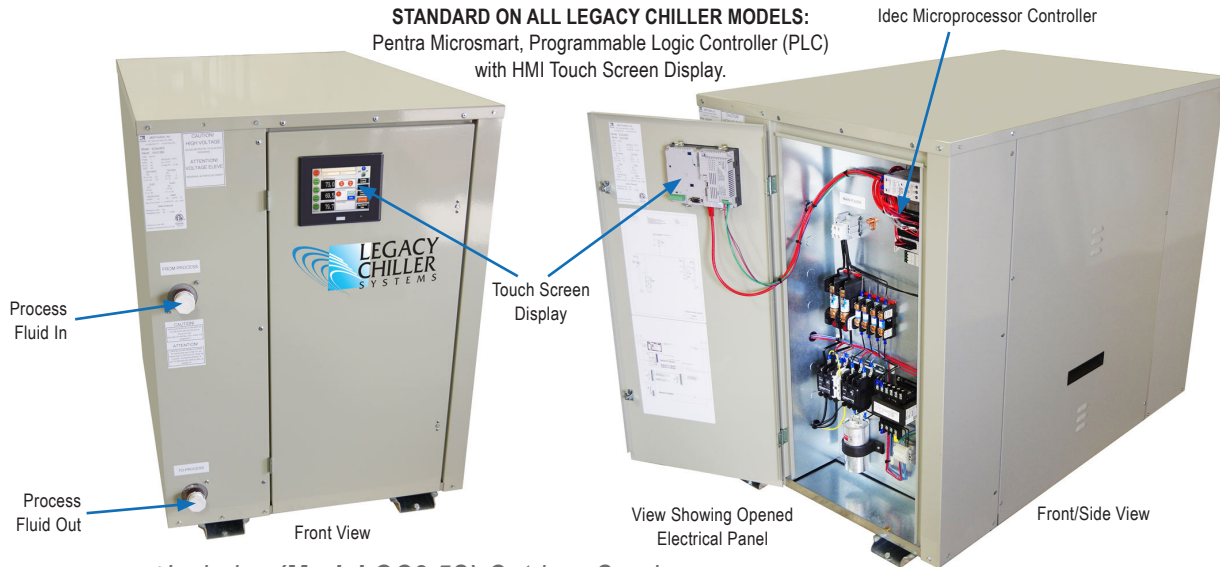

**Includes (Model OC2.5S) Outdoor Condenser*

Standard Features:

- **ETL listed** to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- **Single point power connection**
- **Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display**
- **STAINLESS STEEL**, brazed plate evaporator
- **Scroll** compressor with crankcase heater
- **Suction accumulator**
- **Water flow switch**
- **Hot gas by-pass capacity control**
- **24V control transformer**
- Direct drive condenser fan motor
- Rust resistant, high CFM, aluminum condenser fan blade
- Condenser(s): copper tube/aluminum fin
- Compressor motor contactor
- Condenser motor and control circuit fusing
- **Painted (Powder Coated), galvanized sheet metal cabinet**
- 1/2" insulation on all water and Low pressure refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**
- **Extended warranty:** See your quote or latest IOM booklet revision

Easy to Use
Touch Screen Display
on all Legacy Chiller
Models



Options:

- **Remote Idec touchscreen control panel**
- **Industrial VPN Router**
- **5 Port Ethernet Switch**
- **BacNet Gateway**
- **Process Pump VFD Controller**
- **VFD Compressor Control**
- 4 year extended compressor warranty
- Casters (factory mounted)
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and High/Low voltage
- Compressor fusing
- Compressor Sound Cover
- Flooded cond. w/receiver/head pressure control (0°F)
- Heated, flooded cond. w/receiver/head pressure Water flow meter control (-20°F)
- Dual process pump with auto changeover
- Pump suction isolation valve
- Water pressure gauge set
- Copper finned condenser coil (coastal protection)
- Coastal powder coat paint protection
- **E-Coat Condenser Coil (coastal protection)**
- Water Flow Meter
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionize and reverse osmosis water systems
- Door Mounted HMI with weather proof cover

PRODUCT DATA SHEET

Model: IEZA2.5S
Split-System Air-Cooled
2.5 Ton Chiller



Legacy Chiller Systems
 851 Tech Drive
 Telford, PA 18969
Toll-Free: (877) 988-5464

Dimensional & Electrical Table (Single Circuit)

| Chiller Models | Length Inches | Width Inches | Height Inches | Power | | | Compressor | | RLA ea. | LRA ea. | Fan Motor | | MCA | M.O.P. | Chiller Fluid Conn. | Weight LBS. | Condenser Selection |
|----------------|---------------|--------------|---------------|----------|-------|-------|------------|-----|---------|---------|-----------|------|-----|--------|---------------------|-------------|---------------------|
| | | | | Voltage | Phase | Freq. | Qty. | HP | | | Qty. | FLA. | | | | | |
| IEZA2.5SE5 | 44 | 28 | 36 | 208/230V | 1 | 60Hz | 1 | 3.5 | 19.9 | 104 | 1 | 3.8 | 30 | 45 | 1" FPT | 500 | OC2.5S |
| IEZA2.5SF5 | | | | 208/230V | 3 | 60Hz | | | 12.8 | 93 | | 3.8 | 20 | 30 | | | |
| IEZA2.5SH5 | | | | 460V | 3 | 60Hz | | | 5.8 | 48 | | 1.5 | 15 | 15 | | | |
| IEZA2.5SI5 | | | | 575V | 3 | 60Hz | | | 4.7 | 38 | | 1.72 | 15 | 15 | | | |

OC2.5S (Outdoor Condenser Specs)

| Condenser Model | Length Inches | Width Inches | Height Inches | Fan Motor | | Refrigerant Connections | | Weight / lbs. |
|-----------------|---------------|--------------|---------------|-----------|-----|-------------------------|--------|---------------|
| | | | | Qty. | HP | Discharge | Liquid | |
| OC2.5S | 36 | 34 | 40 | 1 | 1/2 | 1/2" | 3/8" | 200 |

Capacity Table (Refrigerant R407C)

| Model | Compressor | LWT °F | 80°F | | | 90°F | | | 95°F | | | 100°F | | | 105°F | | |
|-------|------------|--------|------|-----|------|------|-----|------|------|-----|-----|-------|-----|-----|-------|-----|-----|
| | | | TONS | KW | EER | TONS | KW | EER | TONS | KW | EER | TONS | KW | EER | TONS | KW | EER |
| 2.5S | ZS26KAE | 42.0 | 3.0 | 2.8 | 10.4 | 2.8 | 3.1 | 9.1 | 2.7 | 3.3 | 8.4 | 2.7 | 3.5 | 7.9 | 2.6 | 3.7 | 7.3 |
| | | 44.0 | 3.1 | 2.8 | 10.6 | 2.9 | 3.2 | 9.3 | 2.9 | 3.4 | 8.7 | 2.8 | 3.5 | 8.2 | 2.7 | 3.7 | 7.6 |
| | | 45.0 | 3.2 | 2.9 | 10.8 | 3.0 | 3.2 | 9.5 | 2.9 | 3.4 | 8.8 | 2.8 | 3.5 | 8.3 | 2.7 | 3.7 | 7.7 |
| | | 50.0 | 3.3 | 2.9 | 11.4 | 3.2 | 3.3 | 10.0 | 3.1 | 3.5 | 9.3 | 3.1 | 3.6 | 8.8 | 3.0 | 3.8 | 8.2 |



Product Dimensional Drawing

