

PRODUCT DATA SHEET

Model: IEZAT8S
Split-System Air-Cooled
8 Ton Chiller



Legacy Chiller Systems
851 Tech Drive
Telford, PA 18969
Toll-Free: (877) 988-5464

with Stainless Steel Tank



STANDARD ON ALL LEGACY CHILLER MODELS:
Pentra Microsmart, Programmable Logic Controller (PLC)
with HMI Touch Screen Display.




User-Friendly
Touch Screen
Display

Discharge
Line

Liquid
Line

Process
Fluid Inlet

Condenser Model (OC8S)

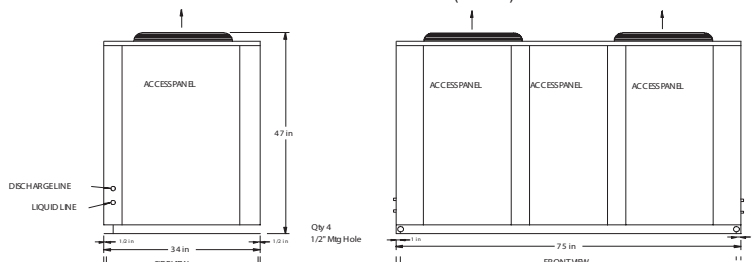

OC Refrigerant Connections: Discharge Line- 7/8", Liquid Line- 5/8"

Standard Features:

- ETL listed to UL1995 & CAN/CSA C22.2 No. 236-11, 4th edition, 10/14/2011
- Single Point Power Connection
- Pentra Microsmart, Programmable Logic Controller (PLC) with easy to use HMI touch screen display
- STAINLESS STEEL, brazed plate evaporator
- Scroll compressor with crankcase heater
- Suction Accumulator
- Water flow switch
- Hot Gas Bypass Capacity Control
- 24V control transformer
- Control circuit fusing
- Compressor motor contactor
- Painted - Powder Coated (Most Models), galvanized sheet metal cabinet
- 1/2" insulation on all water and refrigerant lines
- Liquid line drier, sight glass, solenoid, TXV
- Complete refrigerant charge from factory
- **Factory Performance Test prior to shipment**
- **Extended warranty:** See your quote or latest IOM booklet revision

Tank

- STAINLESS STEEL storage tank with 1/2 inch insulation
- Fused, STAINLESS STEEL re-circulation pump for tank operation with ball valve and cleanable strainer
- Tank pressure relief valve, vent and drain hose bibs

Easy to Use
Touch Screen Display
on all Legacy Chiller
Models



Options:

- Copeland Digital Scroll Compressor
- Remote Idec touchscreen control panel
- Industrial VPN Router
- 5 Port Ethernet Switch
- BacNet Gateway
- Process Pump VFD Controller
- VFD Compressor Control on primary compressor
- 4 year extended compressor warranty
- Condenser water regulating valve
- 115 volt (rain tight) service outlet
- Non Fused Disconnect
- Phase Monitor, line voltage monitor offering protection against phase loss/reversal, unbalance and hi/lo voltage
- Compressor fusing
- Compressor Sound Cover
- Factory installed evaporator heat tape freeze protection
- Low flow by-pass valve
- Fused, STAINLESS STEEL process pump
- Dual system pump with manual changeover (some models)
- Dual system pump with auto changeover (some models)
- Pump suction isolation valve
- Water pressure gauge set
- Water Flow Meter
- Auto city water changeover panel with filter
- Stainless steel, SCH80 PVC or Polypropylene piping for deionized and reverse osmosis water systems
- Door Mounted HMI with weather proof cover

Tank Options

- Storage tank sight glass
- Tank low liquid level indicator with dry contacts
- Auto Tank Fill

PRODUCT DATA SHEET

Model: IEZAT8S
Split-System Air-Cooled
8Ton Chiller



Legacy Chiller Systems
851 Tech Drive
Telford, PA 18969
Toll-Free: (877) 988-5464

with Stainless Steel Tank

Dimensional & Electrical Table (Single Circuit)

Chiller Models	Length Inches	Width Inches	Height Inches	Power			Compressor		RLA ea.	LRA ea.	Fan Motor		Recirculation Pump FLA	MCA	M.O.P	Reservoir Gal.	Chiller Fluid Conn.	Weight LBS.	Condenser Selection				
				Voltage	Phase	Freq.	Qty.	HP			Qty.	FLA.											
IEZAT8SF5	75	34	70	208/230V	3	60Hz	1	9	30.1	225	2	3.8	6.6	60	80	80	1.25" FPT	1150	0C8S				
IEZAT8SH5				460V	3	60Hz			15.5	114										1.5	1.7	25	35
IEZAT8SI5				575V	3	60Hz			12.1	80										1.72	1.5	25	30

Capacity Table (Refrigerant R407C)

Model	Compressor	LWT °F	80°F			90°F			95°F			100°F			105°F		
			TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER	TONS	KW	EER
8S	ZB66KCE	*42.0	6.7	7.1	10.9	6.5	7.8	9.7	6.3	8.2	9.1	6.1	8.6	8.5	5.9	9.0	8.0
		*44.0	7.1	7.2	11.2	6.8	7.9	9.9	6.6	8.3	9.3	6.4	8.6	8.8	6.2	9.1	8.2
		45.0	7.2	7.2	11.4	7.0	7.9	10.1	6.8	8.3	9.5	6.5	8.7	8.9	6.3	9.1	8.4
		50.0	8.0	7.4	12.0	7.8	8.1	10.7	7.5	8.5	10.1	7.3	8.8	9.6	7.1	9.3	8.9

* = Requires the use of glycol.

Product Dimensional Drawing

